



Hydraulic bush cutters DA series for mini excavators from 1 to 5 tons

Internet: www.ghedini.com
E-mail: alessandra@ghedini.com
Tel. +39 532 857373
Fax +39 532 857873



Catalogue nr. 99427



**DA 06 MODEL WITH INTEGRATED
CONNECTION PLATE !!!**



**THIRD HOSE
NOT
NEEDED !!!**

The hydraulic bush cutters DA series have been engineered to be used on mini excavators with a maximum operational weight ranging from around 1,5 to 4 t. The bush cutter works thanks to the hydraulic power of the excavator and it can be plugged very easily, thanks to the use of common attachment hoses.

NO EXTERNAL DRAIN NEEDED!!!

Two models with an operational width of 60 and 80 cm are available.




The hydraulic bush cutter DA series is equipped with a couple of “Y” shaped knives and a third located in the middle, which allows it to reduce all the treated material to fine grains.



Thanks to the **UD** connection plate, you can use the bush cutter DA also on skid loaders. (standard measurements of Bobcat’s skid-loaders)

Technical specifications table of the bush cutter DA series					
Model	Oil flow rate required	Max. pressure	Operational width	Weight	Weight of the excavator
DA 06	26 L/min	250 bar	600 mm	120 kg	1.500-2.500 kg
DA 08	34 L/min	250 bar	800 mm	150 kg	2.000-4.000 kg

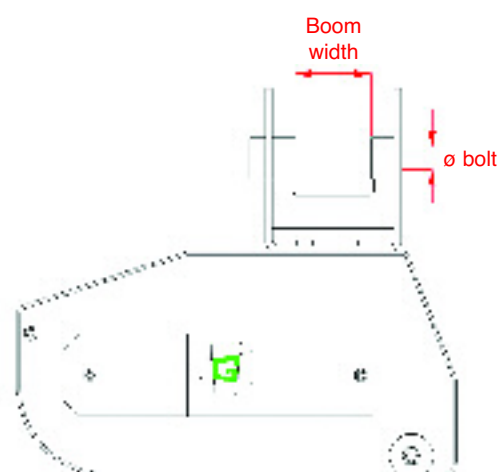

Upon request, it is available a kit, which modifies the hydraulic system and feeds the bush cutter, so that the mini excavator can easily move, despite the reduced speed.